



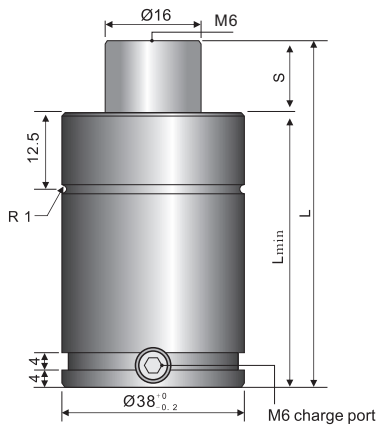

尺寸参数

Order No.	行程S mm	初始力 N	终力 N	Lmin mm	L±0.25mm mm
PLJ300-013	12.5	2900	3800	42.5	55
PLJ300-015	15			45	60
PLJ300-019	19			49	68
PLJ300-025	25			55	80
PLJ300-032	33			63	96
PLJ300-038	37.5			67.5	105
PLJ300-050	50			80	130
PLJ300-063	62.5			92.5	155
PLJ300-075	75			105	180
PLJ300-080	80			110	190
PLJ300-100	100.5			130.5	231
PLJ300-125	125			155	280


曲线图

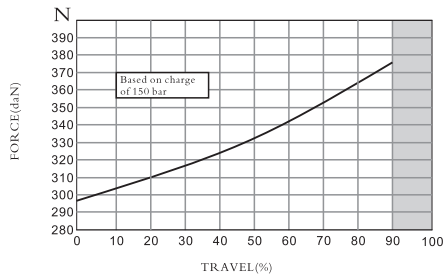

基本参数





充气介质.....氮气N2
充气压力.....25~150Bar
工作温度.....0~80℃
动力/压力随温度增加.....±0.3%/℃
活塞最快速率.....1.6m/s
最大使用行程.....90%

安装建议

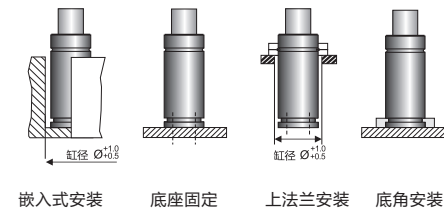

订购方法


PLJ 300-050-P150-XXXX
型号 ———— 安装方式选择
 充气压力(bar)

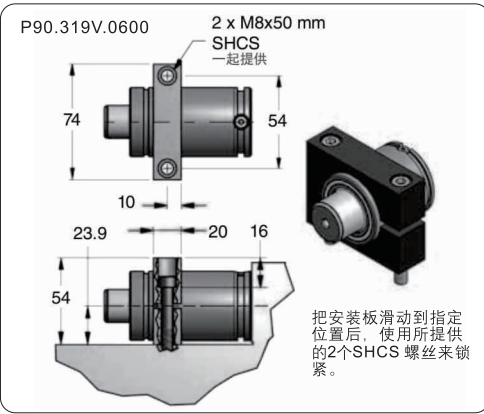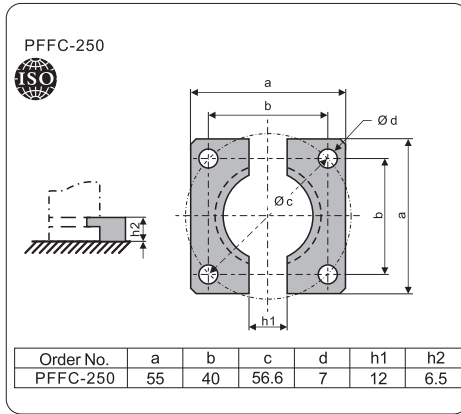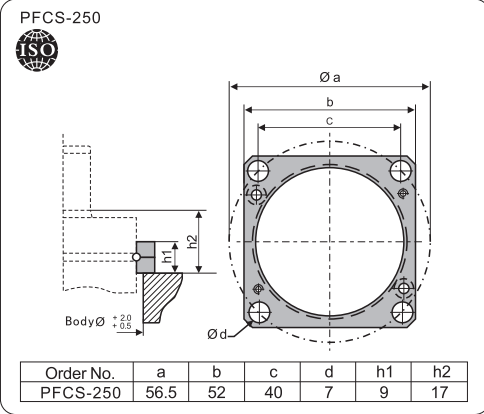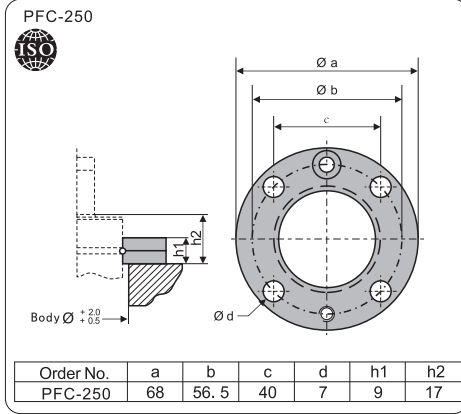



尺寸参数

曲线图




PLJ 500-050-P150-XXXX

型号

安装方式选择



充气压力(bar)

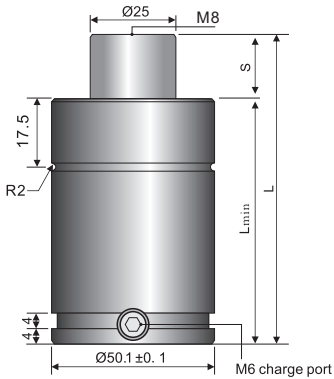

尺寸参数

Order No.	行程S mm	初始力 N	终点力 N	Lmin mm	L±0.25mm mm
PLJ750-013	12.5	7400	12000	50.5	63
PLJ750-019	18.8			56.8	75.6
PLJ750-025	25			63	88
PLJ750-032	31.5			69.5	101
PLJ750-038	37.5			75.5	113
PLJ750-050	50			88	138
PLJ750-063	62.5			100.5	163
PLJ750-075	75			113	188
PLJ750-080	80			118	198
PLJ750-100	100			138	238
PLJ750-125	125			163	288


曲线图

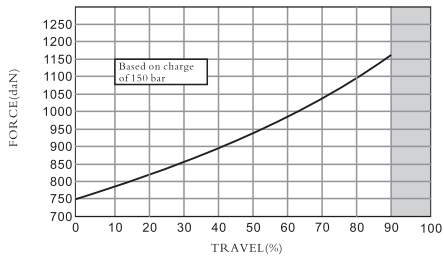

基本参数

充气介质.....氮气N2
充气压力.....25~150Bar
工作温度.....0~80°C
动力/压力随温度增加.....±0.3%/°C
活塞最快速率.....1.6m/s
最大使用行程.....90%

安装建议

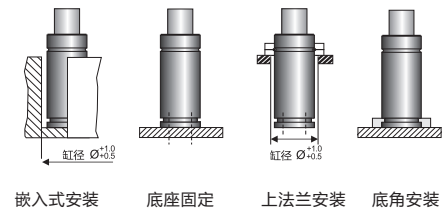


订购方法

PLJ 750-050-P150-XXXX


型号 ————— 安装方式选择 ————— 充气压力(bar)

PFC-750

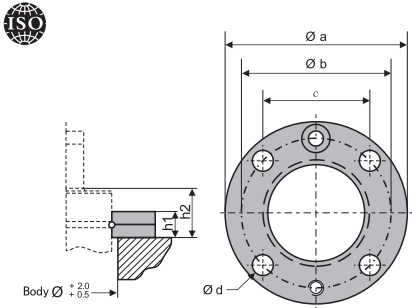


Order No.	a	b	c	d	h1	h2
PFC-750	95	80	56.5	9	13	24

PFC-750

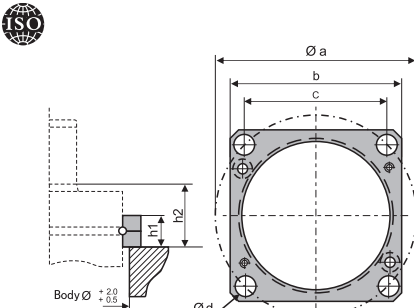


Order No.	a	b	c	d	h1	h2
PFC-750	80	70	56.5	9	13	24

非标定制

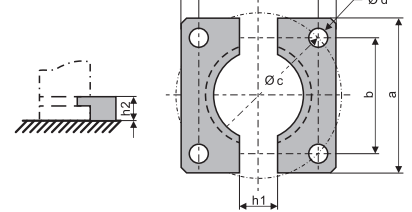


Order No.	a	b	c	d	h1	h2
非标定制	75	56.5	80	9	24	7

P90.319V.1000

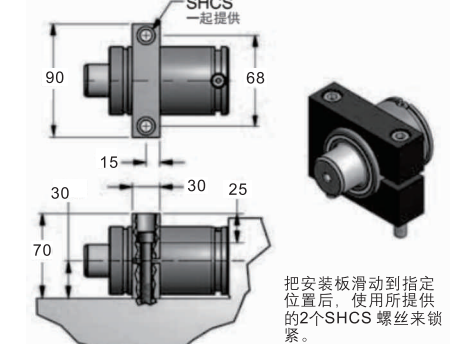

把安装板滑动到指定位置后，使用所提供的2个SHCS 螺丝来锁紧。

PMP-750

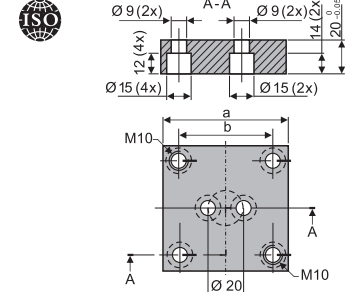

Order No.	a	b
PMP-750	75	56.5